

Smart App Professional Rackmount Series

PR1000/1500/2200ELCDRT2U

PR2UD0012AU-01

Extended Power Protection for Mission-Criticals

CyberPower[®]
Reliability. Quality. Value.



The Professional Rackmount Series UPS provides advanced level of power protection to servers, telecom equipments, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sinewave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The placement-wise design could be configured in either Tower (T) or Rackmount (RM) form with the attached stands and skids to make the most of your workspace.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel[®] Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.

Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business
- Corporate Data Center
- Networking, Servers & Workstations
- Industrial Equipment

Energy-Saving

Pure Sine Wave

EPO Port

SNMP /HTTP


LCD Display

RM/T Form

Series Features

- GreenPower UPS[™] Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Rack/Tower Convertible Configurations
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Lightning Spike Protection
- Critical Load Outlets
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Protected On/Off Switch
- Multifunction LCD Readout
- Rotatable LCD Indicator
- USB & Serial Connectivity Ports
- Hot-Swappable Battery Packs
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel[®] Business Edition Software

Pure Sine Wave Output



For applications that require *Pure Sine Wave* power, CyberPower provides UPS models with *True Sine Wave* output, also known as *Pure Sine Wave*. They are designed for electronic devices that have *Power Factor Correction* (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

PowerPanel[®] Business Edition Management S/W



AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel[®] Business Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.


Smart App Professional Rackmount Series

PR1000/1500/2200ELCDRT2U


CyberPower®
Reliability. Quality. Value.

Technical Specification


Model	PR1000ELCDRT2U	PR1500ELCDRT2U	PR2200ELCDRT2U
Configuration			
Capacity (VA / Watts)	1000 / 700	1500 / 1000	2200 / 1600
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz - 63 Hz (Auto Sensing)		
Input Plug Type	IEC 320 C14		IEC 320 C20
Maximum Input Current	10A		15A
Output			
UPS Outlets (Numbers)	(8) IEC320 C13		
On Battery Output Voltage	Pure Sinewave at 230 Vac +/- 5%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 0.1 Hz		
Typical Transfer Time	4ms		
Overload Protection	Circuit Breaker / Internal Circuitry Limiting		
AVR	Buck / Boost / Double Boost		
Surge Protection and Filtering			
Lightning / Surge Protection	Yes		
DSL / Phone / FAX / Modem Protection	RJ11 / RJ45 (One In / One Out)		
Physical			
Dimensions (H x W x D) (mm)	88 x 433 x 388		
Weight (kg)	25.5	27	30
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 7AH x 4		12V / 9AH x 4
User Replaceable	Yes		
Typical Recharge Time	6 Hours		
Runtimes			
Half-load / Full-load (mins)	32 / 11	18 / 6	16 / 6
Status Indicators			
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-function LCD Readout	Yes		
Communication			
PowerPanel® Business Edition	Windows 7 / Vista / XP / 2000, Server 2003 / 2008		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial ports (RS232, Dry connector)		
SNMP/HTTP Capable	Yes		

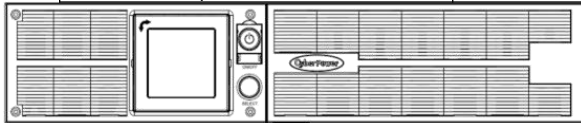

Front

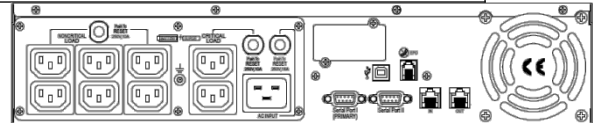

Back (PR2200ELCDRT2U)

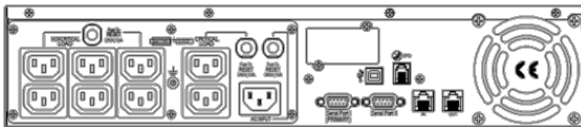

Back (PR1000/1500ELCDRT2U)

Packaging Content

Main Unit	User Manual	Serial Cable (DB-9) x 2
Software CD-ROM	Phone Cable	USB A+B Type Cable
IEC O/P Power Cord x 3*	EPO Cable	Rackmount Bracket x 2
Stand x 2	(M4) Screw x 4	(M5x12) Screw x 5
(M5) Washer x 5	Power Cord**	(M5x10) Screw x 10
Plastic Screw x 5	* IEC O/P Power Cord x 4 for PR 2200 ** Power Cord x 2 for PR 2200	

DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2008,
ISO 14000, and
QC080000
Approved

