

Smart App Professional Rackmount Series

PR1000/1500/2200ELCDRTL2U

PRXL2UD0012AU-01

CyberPower®
Reliability. Quality. Value.

Extended Power Protection for Mission-Criticals



The Professional Rackmount Series UPS provides advanced level of power protection to servers, telecom equipments, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sinewave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. With the add-on advantage of Extended Runtime (XL) battery packs, the UPS backup time can be extended to maximize workflow flexibility. The placement-wise design could be configured in either Tower (T) or Rackmount (RM) form with the attached stands and skids to make the most of your workspace.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.

Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business
- Corporate Data Center
- Networking, Servers & Workstations
- Industrial Equipment

Series Features

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Rack/Tower Convertible Configurations
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Critical Load Outlets
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Protected On/Off Switch
- Multifunction LCD Readout
- Rotatable LCD Indicator
- Extended Runtime (XL) Models
- USB & Serial Connectivity Ports
- Hot-Swappable Battery Packs
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

Energy-Saving

Pure Sine Wave


EPO Port

SNMP /HTTP

XL Model

RM/T Form

Pure Sine Wave Output



For applications that require Pure *Sine Wave* power, CyberPower provides UPS models with True Sine Wave output, also known as *Pure Sine Wave*. They are designed for electronic devices that have *Power Factor Correction* (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

PowerPanel® Business Edition Management S/W



AUTO-SHUTDOWN SOFTWARE
CyberPower PowerPanel® Business Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

*Software functions may vary due to firmware version and/or hardware constraints.


Smart App Professional Rackmount Series

PR1000/1500/2200ELCDRTL2U


CyberPower®
Reliability. Quality. Value.

Technical Specification


Model	PR1000ELCDRTL2U	PR1500ELCDRTL2U	PR2200ELCDRTL2U
Configuration			
Capacity (VA / Watts)	1000 / 750	1500 / 1125	2200 / 1650
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz - 63 Hz (Auto Sensing)		
Input Plug Type	IEC 320 C14		IEC 320 C20
Maximum Input Current	10A		15A
Output			
UPS Outlets (Numbers)	(10) IEC320 C13		(1) IEC320 C19 (9) IEC320 C13
On Battery Output Voltage	Pure Sinewave at 230 Vac +/- 5%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 0.1 Hz		
Typical Transfer Time	4ms		
Overload Protection	Circuit Breaker / Internal Circuitry Limiting		
AVR	Buck / Boost / Double Boost		
Surge Protection and Filtering			
Surge Protection	Yes		
DSL / Phone / FAX / Modem Protection	RJ11 / RJ45 (One In / One Out)		
Physical			
Dimensions (H x W x D) (mm)	88 x 433 x 480		
Weight (kg)	30.8	34.5	34.9
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 9AH x 4		
User Replaceable	Yes		
Typical Recharge Time	6 Hours		
Runtimes			
Half-load / Full-load (mins)	40 / 18	22 / 8	13 / 5
Status Indicators			
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-function LCD Readout	Yes		
Communication			
PowerPanel® Business Edition	Windows 7 / Vista / XP / 2000, Server 2003 / 2008, Linux		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial ports (RS232, Dry connector)		

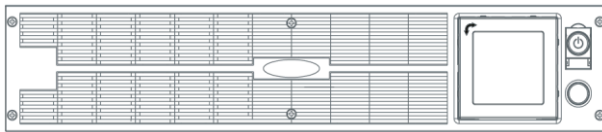

Front

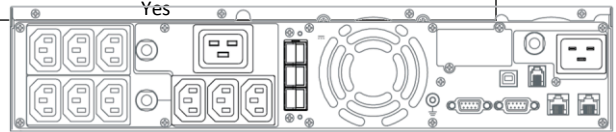

Back (PR2200ELCDRTL2U)

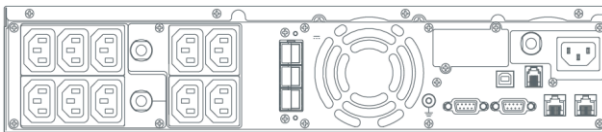

Back (PR1000/1500ELCDRTL2U)

Packaging Content

Main Unit	User Manual	IEC O/P Power Cord x 3*
Software CD-ROM	Phone Cable	USB A+B Type Cable
Serial Cable (DB-9) x 2	EPO Cable	Rackmount Bracket x 2
Skids x 2	Stands x 2	(M4) Screw x 11
(M5x12) Screw x 5	(M5x10) Screw x 14	(M5) Washer x 5
Plastic Screw x 8	Power Cord**	

* Power cord x 4 for PR 2200
** Power Cord x 2 for PR2200



DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2008,
ISO 14000, and
QC080000
Approved