

Backup Value GP Series

Value400E/600E/800E/1000E-GP

CyberPower®
Reliability. Quality. Value.

Best Practices of Energy-Saving Technology

The Value Series UPS offers home and small office users clean and stable battery backup. With Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power.

The included PowerPanel® Personal Edition management software showcases the feature rich abilities such as input/output power voltage readings, self-diagnostics, scheduled-shutdown, and approximate battery backup time. With the Energy-Saving Technology, the Value Series UPS can save up to 75% of electricity therefore save your electricity expenses.



Applications

- Home and Home Office
- Home Theater System
- Small Office

Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Lightning Spike Protection
- Auto-Restart/Auto-Charge
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

Energy-Saving


AVR

Surge Protection


Light-Weight Design

LED Indicator

USB & Serial

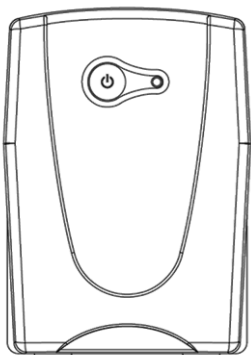

Front

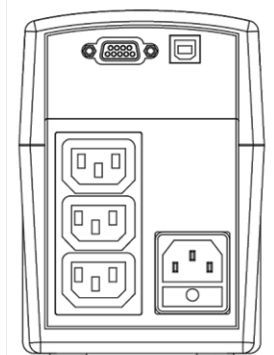

Back



GreenPower UPS™

ENERGY-SAVING TECHNOLOGY

The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

PowerPanel® Personal Edition Management S/W



AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

Backup Value GP Series

Value400E/600E/800E/1000E-GP




Technical Specification

Model	VALUE400E-GP	VALUE600E-GP	VALUE800E-GP	VALUE1000E-GP
Configuration				
Capacity (VA / Watts)	400 / 240	600 / 360	800 / 480	1000 / 530
Energy-Saving Technology	Yes			
Input				
Frequency Range	47 Hz - 63 Hz (Auto Sensing)			
Input Plug Type	IEC 320 C14			
Output				
UPS Outlets (Numbers)	(3) IEC			
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 5%			
On Battery Output Frequency	50 Hz/60 Hz +/- 1%			
Transfer Time (Typical)	4ms			
Overload Protection	On Utility: Fuse & Internal Current Limiting On Battery: Internal Current Limiting			
AVR	Single Boost			
Surge Protection and Filtering				
Lightning / Surge Protection	Yes			
Physical				
Dimensions (H x W x D) (mm)	140 x 100 x 320			
Weight (kg)	4	5.1	6.1	6.2
Battery				
Sealed Maintenance Free Lead Acid Battery	12V / 4.5AH x 1	12V / 7AH x 1	12V / 8.5AH x 1	
Typical Recharge Time	8 Hours			
Runtimes				
Half-load / Full-load (mins)	9 / 1	10 / 2	8 / 1	7 / 1
Status Indicators				
Indicators	Power On, Using Battery			
Audible Alarms	On Battery, Low Battery, Overload			
Multi-functional LCD Readout	N/A			
Communication				
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003			
Management				
Self Test	Yes			
Auto-Charge / Auto-Restart	Yes			
Connectivity Ports	USB, Serial			

#All specifications are subject to change without notice. ©2011 Cyber Power Systems. All Trademarks are the property of their owners.

Packaging Content:

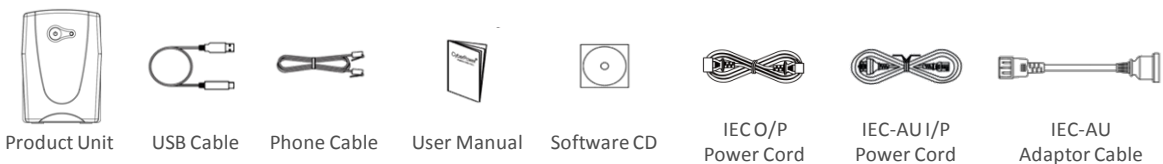

Product Unit

USB Cable

Phone Cable

User Manual

Software CD

IECO/P Power Cord

IEC-AU I/P Power Cord

IEC-AU Adaptor Cable



DISTRIBUTED BY:

CyberPower's Manufacturing Facilities are ISO 9001:2000, ISO 14000, and QC080000 Approved